

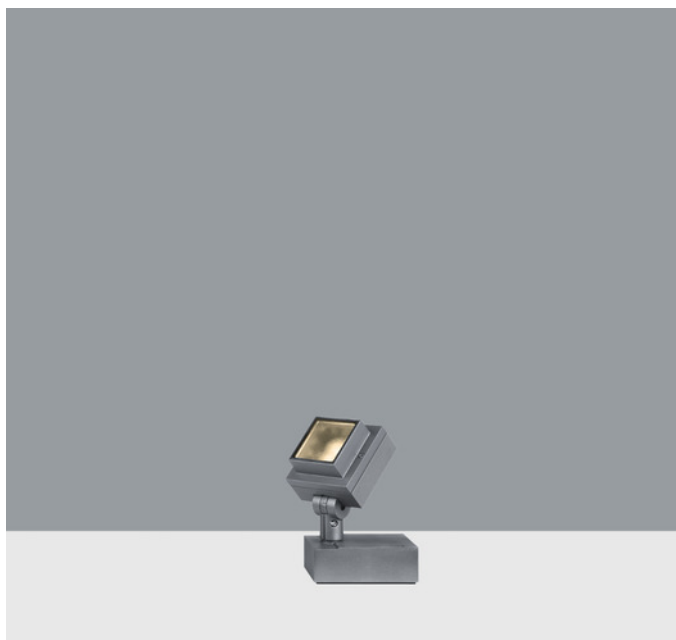






34045.000 Graphit m
LED 12W 1260lm 3000K warm white
Switchable
Version 9
Spherolit lens, oval flood

Product description

Housing, hinge and mounting plate: corrosion-resistant cast aluminium, No-Rinse surface treatment. Double powder-coated. Optimised surface for reduced accumulation of dirt. Hinge with scale and internal wiring. Housing 130° tiltable, rotatable through 360°.
Control gear. 2 cable entries. Through-wiring possible. 3-pole terminal block. LED module: high-power LEDs on metal-core PCB. Collimating lens made of optical polymer. Lens mountable turned through 90°.
Compact light head with non-reflecting safety glass. Corrosion-resistant cast aluminium, double powder-coated. Protection mode IP65: dust-proof and water jet-proof.
Weight 2.30kg
Maximum wind load area 0.026m²
Version with 3000K CRI 97 or 2700K, 3500K, 4000K CRI 92 available on request.

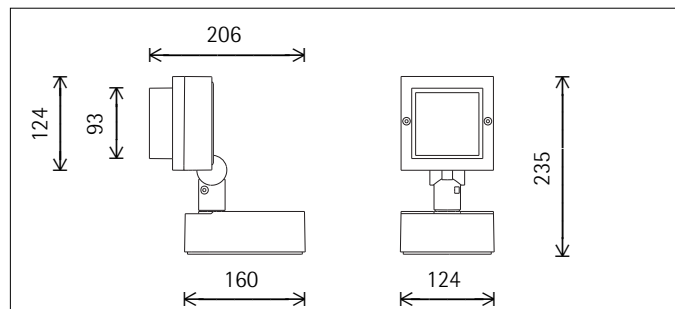

h(m)	E(lx)	D(m)	
		C0	C90
1	2677	1.23	0.30
2	669	2.45	0.60
3	297	3.68	0.90
4	167	4.90	1.20
5	107	6.13	1.49

Technical data

Luminous flux of the luminaire	960lm
Connected load	15.0W
Luminaire efficacy	64lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance (LED manufacturer specifications)	L90/B10 ≤50000h L90 ≤100000h
LED failure rate	0.1% ≤50000h
Dimming range	--
Dimming method	--
LMF	E
Energy efficiency class	EEI A+
Standby power per control gear	--
Luminaires per circuit breaker B16	30

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 13.10.2020
Current version under
www.erco.com/34045.000

Planning data

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79
RSMF	0.99	0.97	0.95	0.92	0.98	0.97	0.95	0.92	0.98	0.97	0.95	0.92

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Technical data in accordance with international norms and standards


IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industrially standard tolerances.
Also see www.ercos.com/ercos-led


Accessories



34974.000
Distribution box, IP68
With four cable entries, 7-25mm.
Polymer.
ø 102mm, L 305mm.
Weight 0.47kg
CE IP 68 3m



33973.000
Ground spike
Metal, hot-dip galvanised.
Cable entry.
Weight 0.48kg



34990.000
Spacer
for surface-mounted cables.
Corrosion-resistant cast aluminium,
No-Rinse surface treatment. Graphit m,
double powder-coated.
Weight 0.16kg

