








72520.000 White (RAL9002)
LED 4W 420lm 3000K warm white
Phase dimmable+ On-board Dim
Version 7
Spherolit lens, narrow spot

Product description

Housing and bracket: cast aluminium, powder-coated. 0°-90° tilt. Bracket rotatable through 360° on 3-circuit adapter.
ERCO control gear, dimmable. Rotary control for brightness regulation.
3-phase adapter for ERCO 220-240V track: polymer, white.
LED module: high-power LEDs on metal-core PCB. Collimating lens made of optical polymer.
Front cover: polymer, black.
Dimming with external dimmers possible (trailing edge).
Weight 0.75kg

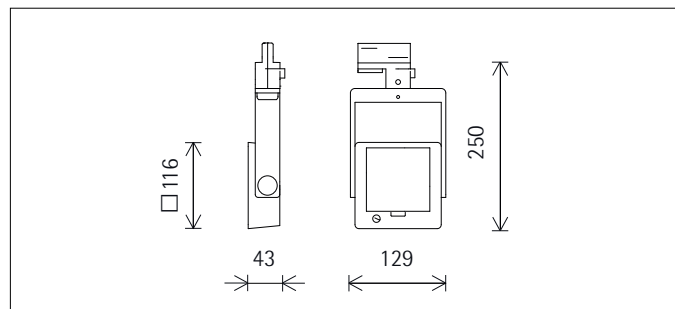

h(m)	E(lx)	D(m)
1	15734	0.12
2	3933	0.24
3	1748	0.37
4	983	0.49
5	629	0.61

Technical data

Luminous flux of the luminaire	372lm
Connected load	6.8W
Luminaire efficacy	55lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance (LED manufacturer specifications)	L90/B10 ≤50000h L90 ≤100000h
LED failure rate	0.1% ≤50000h
Dimming range	1%-100%
Dimming method	CCR_PWM
LMF	E
Energy efficiency class	EEI A+
Standby power per control gear	--
Luminaires per circuit breaker B16	216



Mounting

ERCO 3-circuit track
Hi-trac 3-circuit track
1-circuit singlet

For your regional contact in the ERCO
Sales network click here
www.erco.com/contact

© ERCO GmbH 2021

Technical Region: 220-240V 50/60Hz
We reserve the right to make technical
and design changes.
Edition: 19.10.2020
Current version under
www.erco.com/72520.000

Planning data

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.96	0.94	0.90	0.86	0.93	0.91	0.86	0.81	0.92	0.90	0.84	0.79
RSMF	0.99	0.97	0.95	0.92	0.98	0.97	0.95	0.92	0.98	0.97	0.95	0.92

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1


MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industrially standard tolerances.
Also see www.ercos.com/ercos-led

Accessories

**79837.000**Snoot
Polymer.
White**70607.000**Snoot
Polymer.
Black