

IVY LED

SVIETIDLO


30 W • TEPLÁ BIELA 2806 K • 2200 LM • CRI>94




NARROW FRAME

Dostupné v rozmeroch: 1200×100 mm 600×600 mm 1200×300 mm 600×100 mm

Možnosti montáže

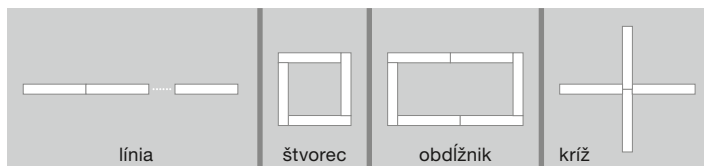

Spájanie do línie



IOI SLOS

Profesionálne osvetlenie

SLOS s.r.o.

Nám. Ľudovíta Štúra 24, Banská Bystrica

tel.: 0903 800 332 | e-mail: js@slos.sk

www.slos.sk / www.12345.sk



manual.12345.sk

IVY LED

SVIETIDLO

ROZMERY • MODELÝ

IVY07 – 1200x300



IVY08 – 1200x100



IVY09 – 600x100



IVY10 – 600x600



MODEL: LED PANEL 1200 IVY07

WISP name: LEDpan1200 IVY07 36W/928 2700lm uzkyR

LED PANEL: 36W; 2700lm; **CRI 94**; 2806K; PF>0,9
Light source / svetelný zdroj: 432 Epistar chips, SMD 2835
Light color / farba svetla: warm / teplá

Body color / farba telesa: white / biela
Dimensions / rozmery: 1195*295*14,2mm
Degrees of protection / stupeň ochrany: IP40
Input Voltage / Vstupné napätie DC: <75V ---
Driver / Predradník: LIFUD constant current LED driver 1000mA TUV driver

Price / Cena: **99,- €** s DPH

MODEL: LED PANEL 600 IVY09

WISP name: LEDpan600 IVY09 20W/928 1500lm uzkyR

LED PANEL: 20W; 1500lm; **CRI 94**; 2806K; PF>0,9
Light source / svetelný zdroj: 96 Epistar chips, SMD 2835
Light color / farba svetla: warm / teplá

Body color / farba telesa: white / biela
Dimensions / rozmery: 595*100*14,2mm
Degrees of protection / stupeň ochrany: IP40
Input Voltage / Vstupné napätie DC: <75V ---
Driver / Predradník: LIFUD constant current LED driver 480mA TUV driver

Price / Cena: **69,- €** s DPH

MODEL: LED PANEL 1200 IVY08

WISP name: LEDpan1200 IVY08 30W/928 2200lm uzkyR

LED PANEL: 30W; 2200lm; **CRI 94**; 2806K; PF>0,9
Light source / svetelný zdroj: 216 Epistar chips, SMD 2835
Light color / farba svetla: warm / teplá

Body color / farba telesa: white / biela
Dimensions / rozmery: 1195*100*14,2mm
Degrees of protection / stupeň ochrany: IP40
Input Voltage / Vstupné napätie DC: <75V ---
Driver / Predradník: LIFUD constant current LED driver 750mA TUV driver

Price / Cena: **89,- €** s DPH

MODEL: LED PANEL 600 IVY10

WISP name: LEDpan600 IVY10 36W/928 2800lm uzkyR

LED PANEL: 36W; 2800lm; **CRI 94**; 2806K; PF>0,9
Light source / svetelný zdroj: 192 Epistar chips, SMD 2835
Light color / farba svetla: warm / teplá

Body color / farba telesa: white / biela
Dimensions / rozmery: 595*595*14,2mm
Degrees of protection / stupeň ochrany: IP40
Input Voltage / Vstupné napätie DC: <75V ---
Driver / Predradník: LIFUD constant current LED driver 900mA TUV driver

Price / Cena: **99,- €** s DPH



IOI SLOS

Profesionálne osvetlenie

SLOS s.r.o.

Nám. Ľudovíta Štúra 24, Banská Bystrica

tel.: 0903 800 332 | e-mail: js@slos.sk

www.slos.sk / www.12345.sk



manual.12345.sk