




Svietidlo s možnosťou nastavenia svietivosti a jej zafixovania v pamäti LED drivera (SLOS service)


Výnimočne kvalitné svietidlo pre tých, ktorí cítia emócie vyvolané svetlom

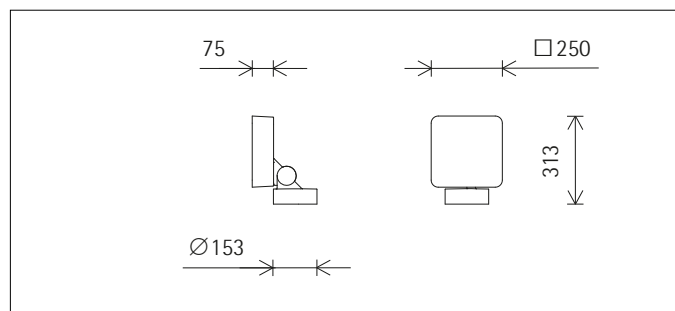

BB. 34588.999 Graphit m
LED 48W 5040lm 3000K warm white
DALI-2
Version 4
Spherolit lens, wide flood

Product description

Housing, hinge and mounting plate: corrosion-resistant cast aluminium, No-Rinse surface treatment. Double powder-coated. Optimised surface for reduced accumulation of dirt. Hinge with internal wiring, 90° tilt. Graduated disc: corrosion-resistant aluminium. Mounting plate rotatable through 300°. 2 DALI control units each with one DALI address. 2 cable entries. Through-wiring possible. 5-pole terminal block. LED module: high-power LEDs on metal-core PCB. Collimating lens made of optical polymer. Screw-fastened cover frame with safety glass: cast aluminium, black powder-coated. Protection mode IP65: dust-proof and water jet-proof. Weight 6.20kg. Housing temperature 45°C. Maximum wind load area 0.07m². Version with 3000K CRI 97 or 2700K, 3500K, 4000K CRI 92 available on request.



h(m)	E(lx)	D(m)
		46°
2	1702	1.70
4	425	3.40
6	189	5.09
8	106	6.79
10	68	8.49

Technical data

Luminous flux of the luminaire	4067lm
Connected load	55.0W
Luminaire efficacy	74lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance (LED manufacturer specifications)	L90/B10 ≤50000h L90 ≤100000h
LED failure rate	0.1% ≤50000h
Dimming range	1%-100%
Dimming method	CCR
LMF	E
Energy efficiency class	EEI A+
Standby power per control gear	--
Luminaires per circuit breaker B16	17