

SMART



Smart is an economical downlight with high output. Its high profile reduces glare even in low ceiling rooms. Luminaire beam angle is 60°.

LIGHTSOURCE OPTIONS

CRI 80 & 90 / 2700K, 3000K, 3500K, 4000K, 5000K

COLOUR CONSISTENCY

MacAdams 3 SDCM

LUMEN MAINTENANCE

50 000h (L70 B50)

LIGHT OUTPUT RATIO

n/a

MATERIAL


Powder painted die-cast aluminium

INSTALLATION

Installation cut-out diameter 160mm, maximum ceiling thickness 25mm, spring mounted, no tools required

COOLING

Passive cooling

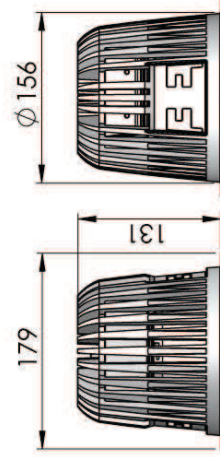

IP20

| LED-module | Colour temp. | | CRI | | Luminous flux | | Power | | Dimming | | Colour | |
|-------------|--------------|--------|--------|--------|---------------|---------|-------|-----|---------|-------|----------|-------|
| | 3 000K | 3 000K | CRI 80 | CRI 90 | 2 000lm | 1 700lm | 16W | 16W | None | 1-10V | Push-dim | Black |
| CLU034-1206 | 3 000K | 3 000K | CRI 80 | CRI 90 | 2 000lm | 1 700lm | 16W | 16W | • | • | • | • |
| CLU034-1206 | 3 000K | 3 000K | CRI 80 | CRI 90 | 4 500lm | 4 500lm | 44W | 50W | • | • | • | • |
| CLU034-1208 | 3 000K | 3 000K | CRI 80 | CRI 90 | 3 900lm | 3 900lm | 44W | 50W | • | • | • | • |