

PRODUCT DATASHEET

HCI-T 35 W/942 NDL PB

POWERBALL HCI-T | Metal halide lamps with ceramic technology for enclosed luminaires



AREAS OF APPLICATION

- Shop interiors, shop windows
- Shopping arcades
- Foyers, reception areas
- Museums, exhibitions
- Exhibition halls and trade fairs
- Factories and workshops
- Approved only for use in enclosed luminaires
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Very high efficiency
- Good to excellent color rendering
- Very good color stability
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

PRODUCT FEATURES

- POWERBALL ceramic technology
- Light colors: warm white (830 WDL, 930 WDL), neutral white (942 NDL)
- Average lifetime: 15,000 h (ECG with 70...400 Hz square-wave current)
- Average lifetime 150 W version: 20,000 h (ECG with 70...400 Hz square-wave current)
- Average lifetime: 12,000 h (with magnetic control gear)



TECHNICAL DATA

Electrical data

Rated wattage	39.00 W
Lamp current	0.53 A
PFC capacitor at 50 Hz	6 µF ¹⁾
Nominal wattage	35.00 W
Ignition voltage	3.6 / 5.0 kVp ²⁾

¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

²⁾ Minimum; for superimposed ignition with square wave electronic ballast 3.0 kVp are sufficient / Maximum; this limit is for safety reasons


Photometrical data

Luminous flux	3400 lm ¹⁾
Luminous efficacy	87 lm/W ²⁾
Color temperature	4200 K
Light color	938
UV protection	Yes
Color temperature	3750 K
Color rendering index Ra	91

¹⁾ In operation with electronic control gear with 70...400 Hz square-wave current. Operation with magnetic ballast can be less efficient

²⁾ In operation with low frequency square wave electronic ballast, 70...400 Hz. Operation with electromagnetic ballast may be less efficient.

Dimensions & weight



Diameter	20.0 mm
Length	100.0 mm
Light center length (LCL)	56.0 mm
Product weight	27.00 g

Temperatures & operating conditions

Maximum permitted outer bulb temperature	500 °C
Maximum permitted pinch temperature	350 °C

Lifespan

Lifespan B50	15000 h ¹⁾
---------------------	-----------------------

¹⁾ At ECG

Additional product data

Base (standard designation)	G12
Design / version	clear
System guarantee level	3 (2/5)
Mercury content	3.6 mg ¹⁾

¹⁾ Maximum


Capabilities

Dimmable	No
Burning position	Any
Enclosed luminaire required	Yes
Hot restart	No

Country-specific categorizations

ILCOS	MT/UB-35/942-H/SL-G12-20/90
--------------	-----------------------------

Light Distribution

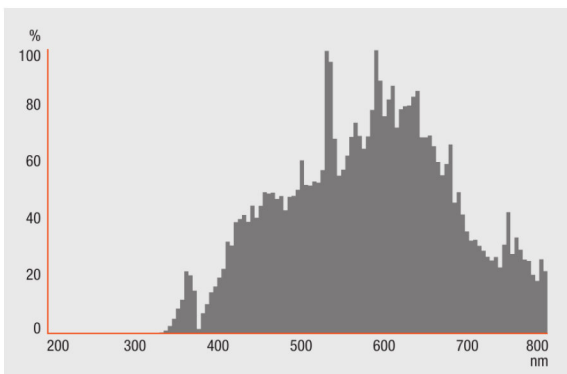

Spectral power distribution

SYSTEM GUARANTEE

When operated with OSRAM POWERTRONIC control gear, an extended system guarantee is granted for these lamps

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321681898	Folding carton box 1	142 mm x 42 mm x 42 mm	42.00 g	0.25 dm ³
4008321681904	Shipping carton box 12	180 mm x 164 mm x 136 mm	586.00 g	4.01 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ www.ledvance.com/system-guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

POWERBALL HCI-T | Metal halide lamps with ceramic technology for enclosed luminaires